

Rubber Roof Flashings

Keylite flashing kits are the most efficient way to ensure a watertight installation for your roof windows and have been designed to integrate efficiently with specific roofing materials.

Rubber Roof Flashing Components

Single Side Soaker (Left) Single Side Soaker (Right) Soaker (Right) Bottom Apron One-piece bottom apro

Tile: RRF

- Roof Pitch 15° 90° Flashing for single window installation where a rubber roofing membrane is applied.
- ► Material Profile Max 10mm


Guarantee

▶ 10 Years - Keylite's hassle free guarantee on flashings.

Finish Options

Exterior - Grey

Size Range

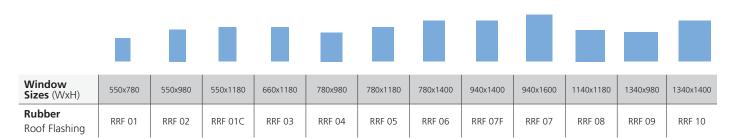

One-piece bottom apronThe unique one-piece bottom apron design improves the aesthetic finish and allows for easy installation.

Note: Alternative sizes are available. Please contact the Keylite Technical Team for further information.

GB

Unit 3 Gateway Road, Burton Gateway, Burton upon Trent, DE13 8FL

NI & ROI

KG2, Ballyreagh Industrial Est. Sandholes Road, Cookstown, Co. Tyrone, BT80 9DG